

Product Manual

Technical Parameters:

1. Working voltage: AC85-256V
2. Operating frequency: 433.92MHZ
3. Maximum quiescent current: $\leq 10\text{mA}$
4. Output current: inductive load $\leq 3.5\text{A}$, resistive load $\leq 10\text{A}$
5. Receiving sensitivity: $> -105\text{dBm}$
6. Supported remote control types: learning code, fixed code
7. Number of remote controls that can be stored: 19

Delete Code:

Press the programming button 8 times. The LED light will flash rapidly 8 times, indicating the code has been successfully cleared. All previously paired remotes will be erased! Please delete existing codes before programming.

Three Working Modes:

A. Momentary Programming Method

Press the controller's programming button once- the LED will blink and stay lit. Press and hold the remote control button - the LED will flash rapidly 3 times, indicating successful programming.



B. Toggle Programming Method

Press the controller's programming button twice- the LED will blink and stay lit. Press and hold the remote control button - the LED will flash rapidly 3 times, indicating successful programming.


C. Latched Programming Method

Press the controller's programming button three times- the LED will blink and stay lit. Press and hold the remote control button - the LED will flash rapidly 3 times, indicating successful programming.

Batch Number: SMG-TY-20240710

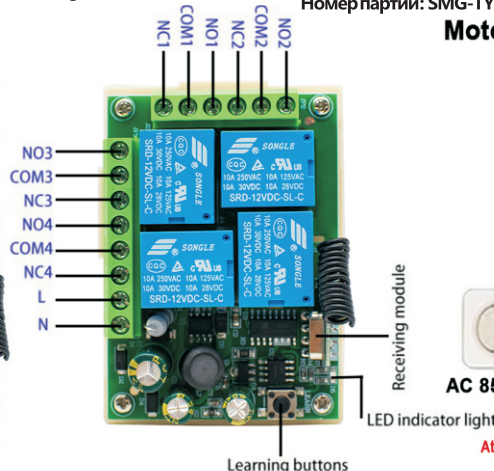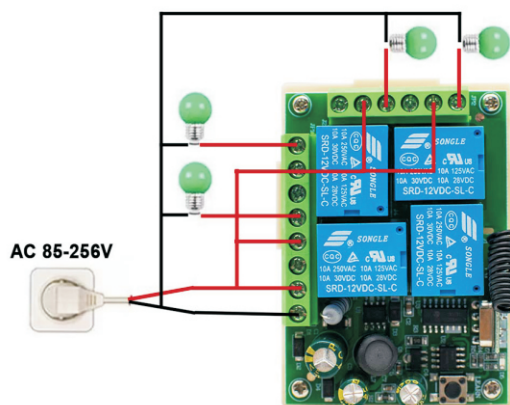

Motor wiring diagram

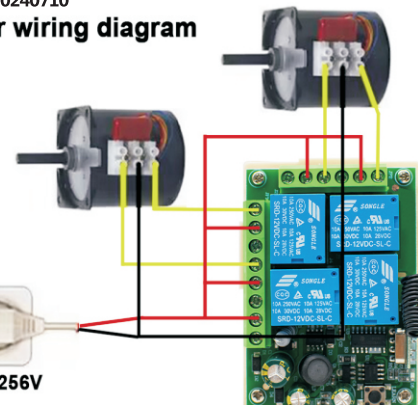

Attention: The motor connection function can only be used work under the Momentary and Latched working models

Руководство по эксплуатации

Технические параметры:

1. Рабочее напряжение: AC85-256V
2. Рабочая частота: 433.92 МГц
3. Максимальный ток покоя: $\leq 10\text{ mA}$
4. Выходной ток: индуктивная нагрузка $\leq 3.5\text{A}$, резистивная нагрузка $\leq 10\text{A}$
5. Чувствительность приема: $> -105\text{ dBm}$
6. Поддерживаемые типы пультов: с обучающимся кодом, с фиксированным кодом
7. Количество записываемых пультов: 19

Удаление кода:

Нажмите кнопку программирования 8 раз. Светодиодный индикатор быстро мигнет 8 раз, что указывает на успешное удаление кода. Все ранее сопряженные пульты будут удалены!

Перед программированием сначала удалите код.

Три режима работы:

A. Метод программирования импульсного режима (Momentary)

Нажмите кнопку программирования на контроллере 1 раз. Светодиодный индикатор мигнет и загорится. Удерживайте кнопку на пульте дистанционного управления, светодиодный индикатор быстро мигнет 3 раза — программирование успешно.

B. Метод программирования переключающего режима (Toggle)

Нажмите кнопку программирования на контроллере 2 раза. Светодиодный индикатор мигнет и загорится. Удерживайте кнопку на пульте дистанционного управления, светодиодный индикатор быстро мигнет 3 раза — программирование успешно.

C. Метод программирования фиксирующего режима (Latched)

Нажмите кнопку программирования на контроллере 3 раза. Светодиодный индикатор мигнет и загорится. Удерживайте кнопку на пульте дистанционного управления, светодиодный индикатор быстро мигнет 3 раза — программирование успешно.

Номер партии: SMG-TY-20240710

Product Manual

Technical Parameters:

1. Working voltage: DC7-30V
2. Operating frequency: 433.92MHZ
3. Maximum quiescent current: $\leq 10\text{mA}$
4. Output current: inductive load $\leq 3.5\text{A}$, resistive load $\leq 10\text{A}$
5. Receiving sensitivity: $> -105\text{dBm}$
6. Supported remote control types: learning code, fixed code
7. Number of remote controls that can be stored: 19

Delete Code:

Press the programming button 8 times. The LED light will flash rapidly 8 times, indicating the code has been successfully cleared. All previously paired remotes will be erased! Please delete existing codes before programming.

Three Working Modes:

A. Momentary Programming Method



Press the controller's programming button once- the LED will blink and stay lit. Press and hold the remote control button - the LED will flash rapidly 3 times, indicating successful programming.

B. Toggle Programming Method


Press the controller's programming button twice- the LED will blink and stay lit. Press and hold the remote control button - the LED will flash rapidly 3 times, indicating successful programming.

C. Latched Programming Method

Press the controller's programming button three times- the LED will blink and stay lit. Press and hold the remote control button - the LED will flash rapidly 3 times, indicating successful programming.

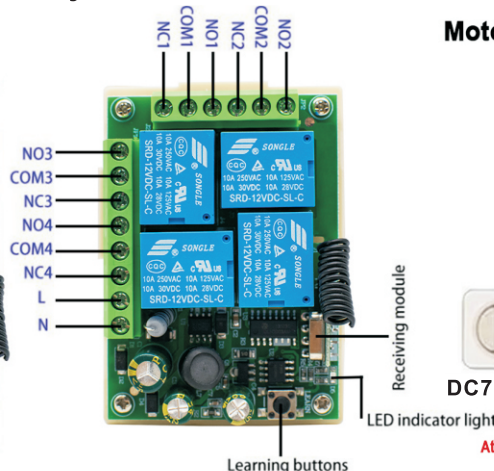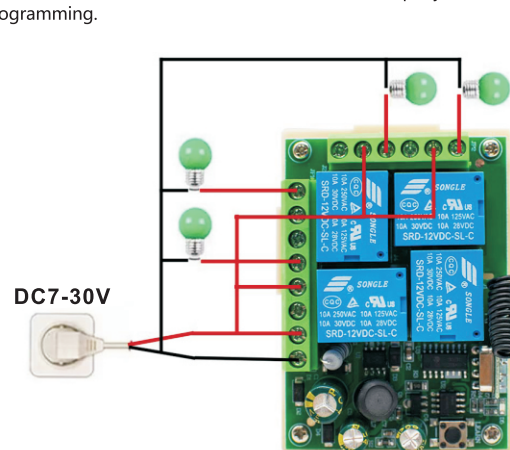

Motor wiring diagram

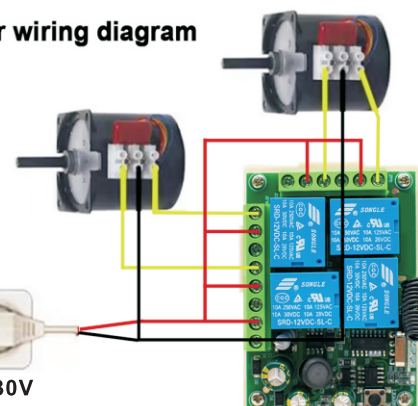

Attention: The motor connection function can only be used work under the Momentary and Latched working models

Руководство по эксплуатации

Технические параметры:

1. Рабочее напряжение: DC7-30V
2. Рабочая частота: 433.92 МГц
3. Максимальный ток покоя: $\leq 10\text{ mA}$
4. Выходной ток: индуктивная нагрузка $\leq 3.5\text{A}$, резистивная нагрузка $\leq 10\text{A}$
5. Чувствительность приема: $> -105\text{ dBm}$
6. Поддерживаемые типы пультов: с обучающимся кодом, с фиксированным кодом
7. Количество записываемых пультов: 19

Удаление кода:

Нажмите кнопку программирования 8 раз. Светодиодный индикатор быстро мигнет 8 раз, что указывает на успешное удаление кода. Все ранее сопряженные пульты будут удалены!

Перед программированием сначала удалите код.

Три режима работы:

A. Метод программирования импульсного режима (Momentary)

Нажмите кнопку программирования на контроллере 1 раз. Светодиодный индикатор мигнет и загорится. Удерживайте кнопку на пульте дистанционного управления, светодиодный индикатор быстро мигнет 3 раза — программирование успешно.

B. Метод программирования переключающего режима (Toggle)

Нажмите кнопку программирования на контроллере 2 раза. Светодиодный индикатор мигнет и загорится. Удерживайте кнопку на пульте дистанционного управления, светодиодный индикатор быстро мигнет 3 раза — программирование успешно.

C. Метод программирования фиксирующего режима (Latched)

Нажмите кнопку программирования на контроллере 3 раза. Светодиодный индикатор мигнет и загорится. Удерживайте кнопку на пульте дистанционного управления, светодиодный индикатор быстро мигнет 3 раза — программирование успешно.